

LOWBED GROUP

LOWBED **SEMI TRAILER**



TECHNICAL SPECIFICATION


Fifth Wheel Height	1263 mm
Loading Platform Height	938 mm (Loaded)
Overall Length	12661 mm
Overall Extended Length	NA
Over All Width	2540 MM+250MM+250MM
Loading Platform Length	8503 mm
Gooseneck Length	3816 mm
Axle Group Capacity	27.000kg
King Pin Capacity	23.000kg
Total GCW (Capacity)	50.000 kg
Total Payload (Capacity)	50.ton
EMPTY WEIGHT OF TRALIER	9.000 kg
Chassis Construction	chassis suitable for 98/91 EEC standards made from high graded steel with "I" profile shape, produced with atomized submerged arc welding system.
Brake System	Brake system suitable for 71 /320 EC and 2002 /78 EC standards.
	Automatic load sense valve RSS (corner stabilizer). ABS 2ES 2 EM
Axles	SERTEL Brand 3x 9-ton capacity, Mechanical suspension
Tires & Rims	12+1 PCS tire with size 235/75 R 17,5
Electrical System	Electrical system suitable for 76/756/EEC,2007/35 EC and ADR standards.
	2×7 pole plugs, 1×15 pole plug suitable for all type truck tractors LED
	system. Front,rear and side warning lights.
Landing Gears	OMS Brand , 24*2 ton carrying capacity, double speed mechanical landing gears.
Rear Loading Ramp	Hydraulic Ramp, ramp overall dimension 3000 mm
Base Plate	68 mm hard wood floor covering, gooseneck covered with checkered plate
Water Tank	30-liter PLASTIC water tank.
Tool Box	1 PCS
Side Protective Bars	Impact-resistant side bicycle protective bar suitable for 70/156 EEC standards
Lashing Hooks and Lashing Points	load lashing hook suitable for safe Cargo transport.
Widening Brackets	2 x 9 PCS widening brackets with 250 mm + 250 mm dimensions
Gooseneck Side Cover	Side covers









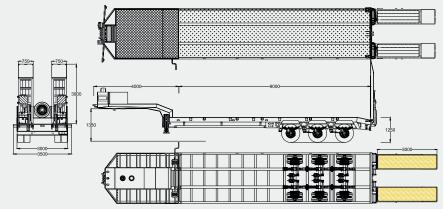









RAM İTHALAT İHRACAT İNŞAAT NAKLİYAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ

Konya Organize Sanayi Bölgesi Gönülveren Sok No: 20/5 Selçuklu / KONYA

www.ramtreyler.com

info@ramtreyler.com

f o ramtreyler

(S) +90 552 642 12 84

Tanzania Service and Spare Parts Sales Point



